

# CG-MAX

**MAX EFFICIENCY WHEEL™**



**CG-MAX WHEELS TAKE:**

- Ergonomics to the **MAX!**
- Wheel longevity to the **MAX!**
- Your purchasing power to the **MAX!**

**EXCLUSIVE**  
**NEW PRODUCT**



The **CG-MAX** wheel was designed and formulated to outperform, outlast, and take **customer efficiency to the MAX**. With best-in-class ergonomics and durability, this versatile polyurethane on aluminum wheel will drive new value into your operations. From improved material flow to safer workplaces, we encourage you to experience the real impact CG-MAX wheels will have on your business by requesting samples today!



- Operational Efficiency:** improve material flow and reduce unwanted maintenance and replacement costs with a wheel that lasts more than 2x\* longer than the leading competitor
- Ergonomic Efficiency:** work safer by reducing the force required to initiate rolling equipment by over 26%\*
- Environmental & Assembly Efficiency:** reduce waste and assembly time with CG-MAX's patent-pending self-retaining top hats that do not require zip ties when being shipped



**THE RESULTS ARE IN:**

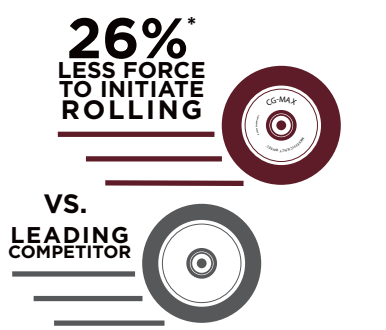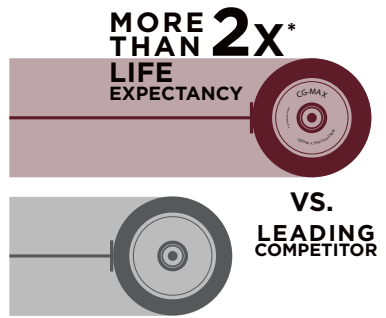

**MATERIAL:** Polyurethane on Aluminum  
**TEMP. RANGE:** -40°F to 180°F  
**DUROMETER:** 85A  
**TREAD PROFILE:** Round

Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) <small>(rated for normal operation)</small>	Hub Length (Inches) <small>(includes top hat)</small>	Bore ID (Inches)	Bearing ID (Inches)	Approx. Wk. (Lbs)	Maroon Wheel Part Number <small>Precision Ball (28)</small>	Orange Wheel Part Number <small>Precision Ball (28)</small>
4	2	800	2-7/16	1-9/16	1/2	1-1/2	AX0422808MAX	AN0422808MAX
5	2	1000	2-7/16	1-9/16	1/2	2	AX0522808MAX	AN0522808MAX
6	2	1250	2-7/16	1-9/16	1/2	3	AX0622808MAX	AN0622808MAX
8	2	1500	2-7/16	1-9/16	1/2	4	AX0822808MAX	AN0822808MAX

\*Dynamic life and ergonomic comparative tests conducted to ANSI/ICWM 2018 standards (sections 6.9 and 6.3) in a Colson Group test facility. All sizes were tested at various capacities up to their maximum capacity to determine the average 26% ergonomic advantage; results may vary by customer due to equipment and flooring variables. All sizes were tested in dynamic life testing; the lowest comparative advantage value was used to claim 2x life advantage, some results were significantly higher.

**SAMPLES AVAILABLE NOW**  
**FULL PRODUCT LAUNCH Q4, 2020**